Full Colour Multi Function Printer



RICOH IM C2000 IM C2500



Take advantage of technology that scales and flexes as your business needs do. Be more productive and efficient with the RICOH IM C2000 / C2500 range of A3 colour devices.

Access a range of productivity features and upgrades -such as scanning directly to your email or dedicated folders on your network and ensure you have the latest security enhancements and mobile device connectivity options. Our intelligent devices are designed to do more as and when our business needs to, using technology that is scalable, secure, sustainable and simple.

Take advantage of:

- Print speeds of 20 25 ppm
- Easy-to-use 10.1" Smart Operation Panel with intuitive menu
- Mobile connectivity options including NFC, AirPrint* or Mopria
- Increased uptime and performance with RICOH Intelligent Support




RicohOutstanding Achievement in Innovation for Ricoh Intelligent Scanning

Get more from your Intelligent Devices

Stellar Performance

RICOH Intelligent Devices remain current and relevant no matter what your workplace requires. This way, you have ready and easy access to new functionality, when needed. Environmentally-friendly low TEC (Typical Electricity Consumption) values, deliver reduced energy consumption and cut running costs. While RICOH Intelligent Support features such as Predictive Maintenance mean that device performance is monitored and any fixes resolved swiftly, minimising impact on your workplace.



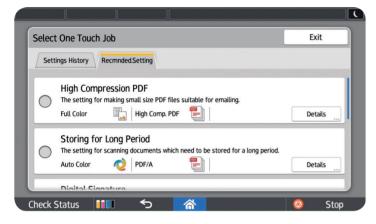


Work-flow Efficiency

You can tailor settings for individual users for quick access to apps which are used more often. The new small sized paper scanning units allow you to scan smaller documents much more conveniently, and the expanded paper tray capacity allows you to work more efficiently. Automatic firmware upgrades ensure that your devices are at maximum security so you can have peace of mind.

Smart Operation Panel

Our range of intelligent devices come fitted with a 10.1" Smart Operation Panel designed to enhance your productivity and mobility. Experience a user interface that offers fast and simple navigation with the ability to customise the layout to best suit your needs - even by adding your own company branding. Access device features, move between jobs and tasks quickly and conveniently enabling teams to work smarter.



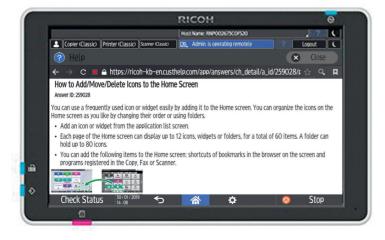

Ease of Use

Quick access to Web Help Tools via RICOH Intelligent Support help customers to complete simple tasks like toner replacement quickly and easily. Our consistent user interface across your Ricoh fleet provides an optimal and familiar experience everywhere and anywhere. Other than RICOH native applications in our intelligent devices, we have also collaborated with third party solutions to optimize your document management workflow.

RICOH IM C2000 / IM C2500

MAIN SPECIFICATIONS

MODEL RICOH IM C2500 RICOH IM C2500		
Warm-up Time 21 Seconds First Output Speed : B/W 5.1 Seconds First Output Speed : Full Color 7.4 Seconds Continuous Output Speed 20ppm 25ppm Memory Std/Max 2GB Std / 4GB Max HDD Std/Max 320GB Std/Max ARDF Capacity 100 Sheets SPDF Capacity 220 Sheets Weight [Mainframe] Less Than 82.5Kg Dimensions W x D x H [Standard] 587 x 685 x 788 mm Dimensions W x D x H [Maximum] 668 x 738 x 1030 mm (excluding ARDF/SPDF) 668 x 738 x 1030 mm (excluding ARDF/SPDF) 700 Power Source 700 Power Power Source 700 Power Powe		
First Output Speed : B/W First Output Speed : Full Color Continuous Output Speed 20ppm 25ppm 2		
First Output Speed : Full Color Continuous Output Speed 20ppm 25ppm Memory Std/Max 2GB Std / 4GB Max HDD Std/Max ARDF Capacity 100 Sheets SPDF Capacity 220 Sheets Weight [Mainframe] Less Than 82.5Kg Dimensions W x D x H [Standard] Dimensions W x D x H [IMaximum] (excluding ARDF/SPDF) Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Up to 999 Copies Resolution From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Resolution Genuine Adobe® Postscript*3''', XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi Network Interface : Standard Ethernet 10 base-T/100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B Network Interface : Option Mobile Printing Capability Apple AirPrint", Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8, I, Windows® Server 2008R, Window		
Continuous Output Speed 20ppm 25ppm Memory Std/Max 2GB Std / 4GB Max 320GB Std/Max ARDF Capacity 100 Sheets SPDF Capacity 220 Sheets Weight [Mainframe] Less Than 82.5Kg Dimensions W x D x H [Standard] 587 x 685 x 788 mm Dimensions W x D x H [Maximum] 668 x 738 x 1030 mm (excluding ARDF/SPDF) 668 x 738 x 1030 mm Copier Multiple Copying Up to 999 Copies Resolution 600 dpi Zoom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript*3", XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi Network Interface : Standard Ethernet 10 base-T/100base-TX/1000 base-T, USB Host U/F Type B Network Interface : Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11ar/bg/n), Additional NIC (2nd port) Mobile Printing Capability Windows® 5erver 2008R, Windows® 5erver 2008RZ, Win		
Memory Std/Max 2GB Std / 4GB Max HDD Std/Max 320GB Std/Max ARDF Capacity 100 Sheets SPDF Capacity 220 Sheets Weight [Mainframe] Less Than 82.5Kg Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Multiple Copying Up to 999 Copies Resolution From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript*®3", XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution Network Interface : Standard Ethernet 10 base-T/100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B Network Interface : Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint*", Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® Server 2008R2, Windows® Server 2		
HDD Std/Max ARDF Capacity 100 Sheets SPDF Capacity 220 Sheets Weight [Mainframe] Less Than 82.5Kg Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Up to 999 Copies Resolution 600 dpi Zoom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language: Standard PCLSc, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language: Option Genuine Adobe® Postscript*3", XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi Network Interface: Standard Ethernet 10 base-T/100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B Network Interface: Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint*", Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® Server 2008, Windows® Server 2008R2, Windows® S		
ARDF Capacity 5PDF Capacity 220 Sheets Weight [Mainframe] Less Than 82.5Kg Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Multiple Copying Up to 999 Copies Resolution 600 dpi Zoom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript*3", XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution Network Interface : Standard Ethernet 10 base-TX/100base-TX/100b base-TX, USB Host I/F Type A, USB Device I/F Type B Network Interface : Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint*", Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2, Windows® Server 2		
SPDF Capacity Weight [Mainframe] Less Than 82.5Kg Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source COPIER Multiple Copying Multiple Copying Resolution Trom 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript® 7, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution Network Interface : Standard Ethernet 10 base-T/100base-TX, 100B Host I/F Type A, USB Device I/F Type B Network Interface : Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint", Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 8,1, Windows® 8,1, Windows® Server 2008, Windows® Server 2008R2, Windows® Se		
Weight [Mainframe] Less Than 82.5Kg Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Resolution Windows® 7, Windows® 8.1, Windows® Server 2008, Windows® Server 2008R, Window		
Dimensions W x D x H [Standard] Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Multiple Copying Up to 999 Copies Resolution 600 dpi Zoom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language: Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language: Option Genuine Adobe® Postscript*3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi Network Interface: Standard Ethernet 10 base-T/100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B Network Interface: Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint™, Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® 5 Server 2008, Windows® Server 2008R2, W		
(excluding ARDF/SPDF) Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Resolution 600 dpi Zoom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language: Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language: Option Genuine Adobe® Postscript®3", XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi Network Interface: Standard Ethernet 10 base-T/100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B Network Interface: Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint", Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® 5erver 2008, Windows® Server 2008R2, Windows		
Power Source 220 - 240V 50/60Hz COPIER Multiple Copying Resolution Common From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi Network Interface : Standard Ethernet 10 base-T/100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B Network Interface : Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint™, Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2, Windows® Server 2008		
Multiple Copying Resolution Good dpi Zoom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language: Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language: Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi Network Interface: Standard Rethernet 10 base-T/100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B Network Interface: Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint™, Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2, Windows®		
Multiple Copying Resolution 600 dpi Zoom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language: Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language: Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi Network Interface: Standard Bethernet 10 base-T/100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B Network Interface: Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint™, Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2, Windows®		
Resolution Toom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language: Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language: Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi Network Interface: Standard Rethernet 10 base-T/100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B Network Interface: Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint™, Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® Server 2008, Windows® Server 2008R2, Wi		
Toom From 25% to 400% in 1% Step PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi Network Interface : Standard Rethernet 10 base-T/100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B Network Interface : Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint™, Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2, Windows® Server 2008		
PRINTER CPU Intel Atom Processor ApolloLake 1.3GHz Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi Network Interface : Standard Ethernet 10 base-T/100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B Network Interface : Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint™, Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2, Windows® Sec		
Printer Language : Standard Printer Language : Option Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi Network Interface : Standard Network Interface : Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint™, Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2, Windows® Server 2		
Printer Language : Standard PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi Network Interface : Standard Ethernet 10 base-T/100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B Network Interface : Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint™, Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2, Windows® Serve		
Printer Language : Option Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® Print Resolution 1,200 x 1,200 dpi Network Interface : Standard Ethernet 10 base-T/100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B Network Interface : Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint™, Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2, Windows® Se		
Print Resolution 1,200 x 1,200 dpi Network Interface : Standard Ethernet 10 base-T/100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B Network Interface : Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint™, Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2, Windows® Server 200		
Network Interface: Standard Ethernet 10 base-T/100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B Network Interface: Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint™, Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2, Windows® S		
Network Interface : Option Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) Mobile Printing Capability Apple AirPrint™, Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2,		
Mobile Printing Capability Apple AirPrint™, Mopria, Google Cloud Print, NFC, Ricoh Smart Device Connector Windows® 7, Windows® 8.1, Windows® 10, Windows® Server 2008, Windows® Server 2008R2, Wind		
Windows® 7, Windows® 8.1, Windows® Server 2008, Windows® Server 2008R2, Window		
	2012B2	
WILLIAMS JEIVEL ZUIU	ver 2012R2,	
Mac OS environments Macintosh OS X10.11 or Later		
UNIX environments UNIX Sun® Solaris, HP-UX, SCO OpenServer, RedHat® Linux Enterprise, IBM® AIX		
SAP® environments SAP® S/4®		
Other Supported environments IBM iSeries		
SCANNER		
Scanning Speed 120ipm (Simplex) / 240ipm (duplex)		
Resolution : Maximum 1,200 dpi		
Compression Method TIFF (MH, MR, MMR, JBIG2), Grayscale	TIFF (MH, MR, MMR, JBIG2), Grayscale	
File Formats Single Page TIFF, Single page JPEG, Single Page High compression PDF, Single page PDF-A, Multi page Multi page PDF, Multi page High compression PDF, Multi Page PDF-A	Single Page TIFF, Single page JPEG, Single Page High compression PDF, Single page PDF-A, Multi page TIFF, Multi page PDF, Multi page High compression PDF, Multi Page PDF-A	
Scan Modes Email, Folder, USB, SD Card	Email, Folder, USB, SD Card	
CSIMILE		
Circuit PSTN, PBX		
Tranmission Speed 2 Seconds		
Modem Speed: Maximum 33.6 Kbps		
Resolution : Standard 8 x 3.65 line/mm, 200 x 100 dpi	8 x 3.65 line/mm, 200 x 100 dpi	
Resolution: Option 16 x 15.4 line/mm, 400 x 400 dpi	16 x 15.4 line/mm, 400 x 400 dpi	
,	MH, MR, MMR, JBIG	
Compression Method MH, MR, MMR, JBIG		
Compression Method MH, MR, MMR, JBIG Memory: Standard 4MB (320 Pages)		
Compression Method MH, MR, MMR, JBIG Memory: Standard 4MB (320 Pages) Memory: Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6		
Compression Method MH, MR, MMR, JBIG Memory : Standard 4MB (320 Pages) Memory : Maximum 60MB (4,800 Pages) PAPER HANDLING		
Compression Method MH, MR, MMR, JBIG Memory: Standard 4MB (320 Pages) Memory: Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets Paper Input Capacity Max 2,300 Sheets		
Compression Method MH, MR, MMR, JBIG Memory: Standard 4MB (320 Pages) Memory: Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets Paper Output Capacity Std 500 Sheets		
Compression Method MH, MR, MMR, JBIG Memory: Standard 4MB (320 Pages) Memory: Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets Paper Output Capacity Std 500 Sheets Paper Output Capacity Std 500 Sheets Paper Output Capacity Max 1,625 Sheets		
Compression Method MH, MR, MMR, JBIG Memory: Standard 4MB (320 Pages) Memory: Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets Paper Output Capacity Std 500 Sheets		
Compression Method MH, MR, MMR, JBIG Memory: Standard 4MB (320 Pages) Memory: Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets Paper Output Capacity Std 500 Sheets Paper Output Capacity Std 500 Sheets Paper Output Capacity Max 1,625 Sheets	paper,	
Compression Method MH, MR, MMR, JBIG Memory: Standard 4MB (320 Pages) Memory: Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets Paper Output Capacity Std 2,300 Sheets Paper Output Capacity Std 500 Sheets Paper Output Capacity Max 1,625 Sheets Paper Weight Plain paper, Recycle paper, Special paper, Color paper, Letterhead, Cardstock, Preprinted paper, Bond	paper,	
Compression Method MH, MR, MMR, JBIG Memory: Standard 4MB (320 Pages) Memory: Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets Paper Output Capacity Max Paper Output Capacity Std 500 Sheets Paper Output Capacity Max Paper Weight Paper Weight Paper Types Plain paper, Recycle paper, Special paper, Color paper, Letterhead, Cardstock, Preprinted paper, Bond Coated paper, Envelope, Gloss paper, Label paper, OHP	paper,	
Compression Method MH, MR, MMR, JBIG Memory: Standard 4MB (320 Pages) Memory: Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets Paper Output Capacity Max 2,300 Sheets Paper Output Capacity Std 500 Sheets Paper Output Capacity Max 1,625 Sheets Paper Weight Paper Types Plain paper, Recycle paper, Special paper, Color paper, Letterhead, Cardstock, Preprinted paper, Bond Coated paper, Envelope, Gloss paper, Label paper, OHP ECOLOGY	paper,	
Compression Method MH, MR, MMR, JBIG Memory: Standard 4MB (320 Pages) Memory: Maximum 60MB (4,800 Pages) PAPER HANDLING Recommended Paper Size SRA3, A3, A4, A5, A6, B4, B5, B6 Paper Input Capacity Std 1,200 Sheets Paper Input Capacity Max 2,300 Sheets Paper Output Capacity Std 500 Sheets Paper Output Capacity Max 1,625 Sheets Paper Weight Paper Types Plain paper, Recycle paper, Special paper, Color paper, Letterhead, Cardstock, Preprinted paper, Bond Coated paper, Envelope, Gloss paper, Label paper, OHP ECOLOGY Power Consumption: Max Less Than 1,700 W	paper,	

RICOH IM C2000 / IM C2500

MAIN SPECIFICATIONS

MODEL	RICOH IM C2000	RICOH IM C2500		
OUTPUT TRAY AND FINISHER OPTION				
1 x 550-Sheets Paper Tray (PB 3270)	Paper Size: A6-SRA3, Paper Weight: 60-300g/m²			
2 x 550-Sheets Paper Tray (PB 3300)	Paper Size: A6-SRA3, Paper Weight: 60-300g/m²			
1,000-Sheet Booklet Finisher (SR3270)	Paper Size: Proof Tray: A6-A3, Shift Tray: A6-A3, Booklet tray: A4-A3 Paper weight: 60-300g/m² Staple paper size: A4-A3, Staple paper weight: 52-105g/m Staple position: Top, Bottom, 2 Staples, Booklet Staple capacity Max: 50 sheets (A4) 30 Sheets (A3)			
500-Sheet Internal Finisher (SR3250)	Paper Size : A6-A3, Paper weight : 60-300g/m² Staple paper size : A4-A3, Staple paper weight :52-105g/m Staple position : Top, Bottom, 2 Staples Staple capacity Max : 50 sheets (A4) 30 Sheets (A3)			
250-Sheet Internal Finisher (SR3300)	Paper Size : A6-A3, Paper weight : 60-300g/m² Staple paper size : A4-A3, Staple paper weight :52-105g/m Staple position : Top,1 Staple Staple capacity Max : 2-5 sheets (A4)			
Internal Shift Tray (SH3080)	Tray Capacity: 250 sheets, Paper size: 320 mm x 600 mm or smaller, Paper weight: 60-300g/m²			
One-bin tray (BN3130)	Tray Capacity: 125 sheets, Paper size: A5 - A3, Paper weight: 52-300g/m²			

OTHER OPTIONS

Platen Cover PN2000, DF3110, DF3120, Fax Option Type M37, G3 Interface Unit Type M37,Fax Connection unit Type M37,FAX Memory unit Type M19 64MB, Memory Unit Type M37 4GB, Caster Table Type M3, VM Card Type M37, Side Tray, Punch Unit NA/EU/SC (PU3070,PU3080), Camera direct print card, Postscript3 Unit Type M37, XPS direct print Option Type M37, IEEE 1284 I/F Type M19, IEEE 802.11a/g/n I/F Type M19, Device server option Type M37, File format Converter Type M19, OCR Unit Type M13, Small Paper Feeding Unit Type M37, Page Keeper Type M37, ADF Handle, External Keyboard Bracket Type M19, Optional Counter Interface Unit Type M12, Key Counter Bracket Type M37, NFC Card Reader Type M37, Smart Card Reader Built in Unit Type M37, External USB Keyboard (No bracket), Unicode Font Package for SAP®License.



RICOH (MALAYSIA) SDN BHD

Lock + Store, Level 1 & 3, No.5, Jalan Penyair U1/44 Off Jalan Glenmarie, 40150 Shah Alam, Selangor Darul Ehsan, Malaysia. Hotline: 1300 88 8228











RICOH @Remote

All brand and/or product names are trademarks of their respective owners. Specifications and external appearance are subject to change without notice. The colour of the actual product may vary from the colour shown in the brochure. The images in this brochure are not real photographs and slight differences in detail might appear. Copyright © 2019 Ricoh Asia Pacific Pte Ltd. All rights reserved. This brochure, its contents and/or layout may not be modified and/or adapted, copied in part or in whole and/or incorporated into other works without the prior written permission of Ricoh Asia Pacific Pte Ltd.











^{*}AirPrint certification will be available in 2019.